

SIL-AIR 50 TC



50 l/min - 1.77 CFM


8 bar - 116 psi

Modello con telaio in tubolare
 Model with tubular frame
 Modèle avec structure tubulaire
 Modelle mit Rohrrahmen
 Modelo con chasis tubular

Volt/Hz	l/min (CFM) *	l (Gal.)	Watt	dB/1m	Kg (Lbs)	Kg (Lbs)
230/50 115/60	37 (1.3) 44 (1.55)	3.5 (0.92)	340 400	40	21 (46)	22 (48)

* = @ 5 bar (70 PSI)

	A mm	B mm	C mm
	280	350	340
	300	380	370

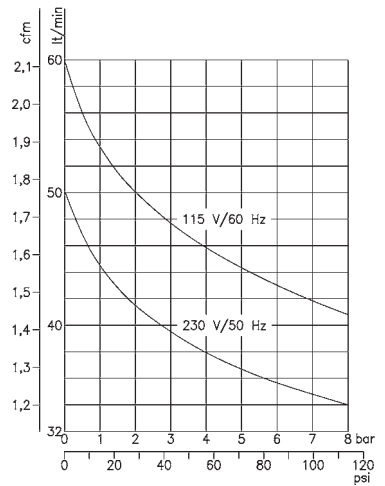

OPZIONI / OPTIONALS / OPTIONS / SONDERZUBEHÖR / OPCIONES



SIL-AIR 50 TC AL

Motore con coperchio alettato
 Motor with cooling head
 Moteur avec couvercle à ailettes
 Motor mit Kühlrippen
 Motor con cabeza aletada